

Marbella v

1/10" structuurlus

1/10" structuré

1/10" Strukturschlinge

1/10" scroll

100% polyamide

100% polyamide

100% Polyamide

100% nylon

RUG

Vilt

DOSSIER

Feùtre

RÜCKEN

Vlies

BACKING

Feltback

POOLHOOGTE

± 6 mm

HAUTEUR DU VELOURS

± 6 mm

POLHÖHE

± 6 mm

PILE HEIGHT

± 6 mm

TOTALE HOOGTE

± 8 mm

HAUTEUR TOTALE

± 8 mm

GESAMTHÖHE

± 8 mm

TOTAL HEIGHT

± 8 mm

POOLGEWICHT

± 420 g/m²

POIDS DU VELOURS

± 420 g/m²

POLGEWICHT

± 420 g/m²

PILE WEIGHT

± 420 g/m²

TOTAAL GEWICHT

± 1.350 g/m²

POIDS TOTAL

± 1.350 g/m²

GESAMTGEWICHT

± 1.350 g/m²

TOTAL WEIGHT

± 1.350 g/m²

AANTAL NOPPEN/M²

± 180 000

NOMBRE DE POINTS/M²

± 180 000

NOPPEN/M²

± 180 000

TUFT DENSITY/M²

± 180 000

AANBEVOLEN LEGWIJZE

- Spannen op klitband
- Universele fixeerlijm
- Verhuislijm

POSE PRÉCONISÉE

- Tendre sur bandes autoagrippantes
- Produit de maintien
- Fixateur

EMPFOHLENE VERLEGEART

- Verspannen auf Klettband
- Universalfixierung
- Wiederaufnahmeklebstoff

INSTALLATION METHOD

- Stretched on hook tape
- Release bond

GEBRUIK

- Klasse 22: Gemiddeld huishoudelijk
- Comfort : 1
- Geschikt v. vloerverwarming
- Brandklasssem. E_{fl} EN 13501-1

UTILISATION


- Classe 22: Domestique modéré
- Confort : 1
- Classsem. feu E_{fl} EN 13501-1
- Compatible avec sol chauffant
- Résistance thermique: ISO 8302: 0.13 m² K/W

EINSATZ

- Klasse 22: mittel
- Komfort : 1
- Baust.klasse E_{fl} EN 13501-1
- Geeignet f. Fussbodenheizung
- Wdw. ISO 8302: 0.13 m² K/W

USAGE

- Class 22: medium domestic
- Comfort : 1
- Fire resist. E_{fl} EN 13501-1
- Suitable f. floorheating

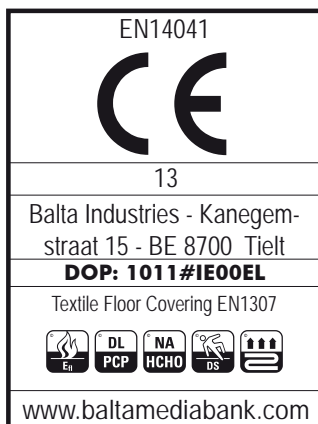

EAC



Onder voorbehoud van wijzingen van de technische specificaties - Sous réserve de modifications techniques - Unter Vorbehalt von technischen Änderungen- All rights reserved to alter technical specification

Marbella v ↔97cm ↕92 cm	25	31	35	44	53	64
ca 4m	○	○	○	○	○	○
ca 5m	○	○	○	○	○	○



Marbella v



31

35



25

53

64

44